

EMPARRO® 3~

Two-/three-phase,
primary switched

– short circuit and overload
protected (Current limiter)

– Power Boost 150 %

– Parallel connection



Emparro
120 W



Emparro
240 W



Emparro
480 W



Emparro
960 W



Ordering data	Current	Art. No.	Current	Art. No.	Current	Art. No.	Current	Art. No.
24 V DC	5 A	85690	10 A	85691	20 A	85692	40 A	85693
Input								
Input voltage	3x24 V AC...572 V AC/ 450 V DC...745 V DC							
Inrush current after 1 ms	< 14 A							
Output								
Output voltage	adjustable 24...28V DC							
Power Boost	150 % for 5 seconds							
Efficiency	up to 95 %							
Protection	short-circuit and overload protected (output), Current limiter							
General data								
MTBF	> 1.000.000 h		> 950.000 h		> 775.000 h			
Mains failure bridging	> 25 ms at 400 V AC		> 20 ms					
Status display	LED green/red							
Standards	EN 60950-1, EN 61204-3, EN 55011 B, EN 61000-3-2							
Temperature range	-25...+60 °C/60...70 °C Derating (start up -40 °C/storage temperature -40 ... +85 °C)							
Mounting method	DIN-rail mounting TH35 (EN 60715)							
Other	Relay alarm contact for short-circuit, overload and over-temperature						add. alarm contact prev. diagnostics	
Approvals	UL listed, UL recognized and GL in preparation							
Dimensions (H x W x D)	50 x 143 x 143 mm	65 x 143 x 143 mm		65 x 143 x 167 mm		109 x 138 x 182 mm		
Shock acc. to IEC 60068-2-27	50 g		30 g		30 g*			

* up to 50 g with screw mounting plate (Art. No. 89519)

THE OPTIMUM POWER MANAGEMENT SYSTEM

REDUNDANCY MODULES

Description	Description	Art. No.
MB Redundancy Balance	2 x 20A, 50 % / 50 % Balancing Function	85496
MB Redundancy Basic	2 x 20A	85495

BUFFER MODULES

Description	Description	Art. No.
Emparro Cap 20/24 1,0 s	Buffer time 1.0 sec / 20 A	85458
MB Cap 20/24 200 ms	Buffer time 0.2 sec / 20 A	85394
MB Cap Ultra 10/24 38 s	Buffer time 38.0 sec / 10 A	85467
MB Cap Ultra 20/24 16 s	Buffer time 16.0 sec / 20 A	85468

INTELLIGENT POWER DISTRIBUTION

Description	Description	Art. No.
MICO+ 4.4, 4-channel	1A, 2A, 3A, 4A adjustable incl. NEC Class 2	9000-41084-0100400
MICO+ 4.6, 4-channel	1A, 2A, 4A, 6A adjustable	9000-41084-0100600
MICO+ 4.10, 4-channel	4A, 6A, 8A, 10A adjustable	9000-41084-0401000

COMPACT

3-PHASE POWER SUPPLIES OF THE LATEST GENERATION

EMPARRO® 3~ PREMIUM POWER

Murrelektronik's Emparro family has a new member. The newly developed Emparro 3-phase power supplies for 24V applications are important components in quality power management systems. They are extremely reliable, extraordinarily efficient and they don't require much space in the cabinet.

EMPARRO® 3~ MEANS...

- **Maximum reliability**
 - MTBF of 1,000,000 hours
 - Integrated gas discharge valve protects from interference pulses
 - Up to 95 % efficiency rating
- **Optimum performance**
 - Permanently overload protected – up to 20 %
 - Power and hyper boost functions for starting high loads
- **Space saving**



PRACTICAL FEATURES

- Continuous 2-phase operation
- Parallel operation
(Connect up to five units to each other)
- Alarm contact & LED
- Derating from 60 °C



PUSH-IN TERMINALS

The vibration resistant push-in terminals make installation tool free so connection maintenance becomes a thing of the past.

Emparro power supplies are UL listed and UR recognized.



COMPACT

Power Supplies for Maximum RELIABILITY

Reliable power supplies are an essential component to ensure maximum availability of machines and systems. Therefore, reliability was a high priority during development of these new 3-phase units.



MTBF OF UP TO 1,000,000 HOURS

Achieving this MTBF is possible because of our high quality components, the modern and slim circuit board design and the processor-controlled electronics.




INTEGRATED GAS DISCHARGE VALVE PROTECTS FROM INTERFERENCE PULSES

An integrated gas discharge valve protects the power supply from interfering pulses up to 6 kV. Therefore, overvoltage coming from the mains, EMC interference (as caused by frequency converters) or contact bounces cannot cause any damage.



PREVENTIVE DIAGNOSTICS – JUST IN TIME...

Emparro 3~ 40 A continuously monitors parameters like temperature, load or number of starts. The unit generates a message when it's time to be replaced. Replacement can be scheduled for the next service interval. This reduces downtime.



EFFICIENCY – HIGHLY EFFICIENT


Emparro 3-phase has such a long life span because of its efficiency rating of up to 95%. The resulting power loss is very low which exposes the components to less thermal stress.



Power Supplies for OPTIMUM PERFORMANCE

Emparro 3-phase power supply units have a special feature: integrated reserve power.

5 A	EMPARRO® 3~ 24 VDC/5A	6 A
10 A	EMPARRO® 3~ 24 VDC/10 A	12 A
20 A	EMPARRO® 3~ 24 VDC/20 A	24 A
40 A	EMPARRO® 3~ 24 VDC/40 A	48 A

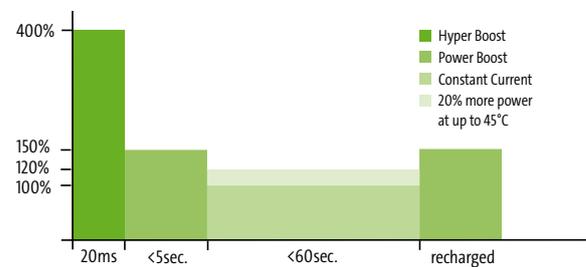

20% MORE POWER!

Emparro 3-phase power supply units can be operated with up to 20 % overload in ambient temperatures of up to 45°C. The 5 A models continuously supply 6 A, 10 A models 12 A, 20 A models 24 A and 40 A models 48 A.

HYPER UND POWER BOOST

Emparro 3-phase features 2 different boost functions: power boost and hyper boost. The Power Boost supplies 50% more power for up to 5 seconds while the Hyper Boost provides up to 400% more power for up to 20 ms.

Free Up Valuable Cabinet Space

Emparro 3-phase power supplies are very compact. The housing for the 20 A model is only 65 mm wide. This saves a lot of space in the cabinet.

SPACE SAVINGS OF UP TO 56%.

